

## HK-032/55 Combination inserts


250/50V 10/4A 32/55+ 

## Inserts

Hoods/Housings: size 10B, please find the details on page 15-39~15-69.

Crimp terminal  
order crimp contacts separately

| Insert | Designation  | Order No.        |
|--------|--------------|------------------|
| Male   | HK-032/55-MC | 128 087 010 0001 |
| Female | HK-032/55-FC | 128 087 020 0001 |

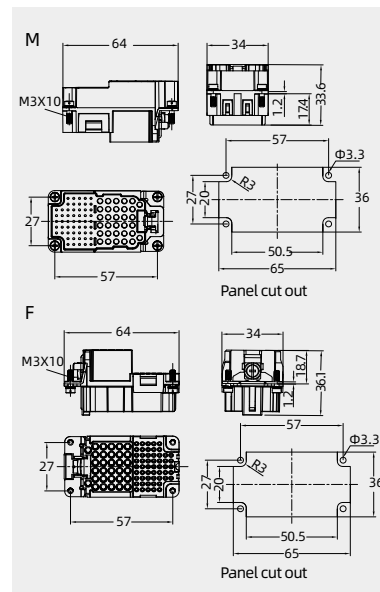

## Crimp contacts

Crimp contacts 5A

Contact resistance  $\leq 3\text{m}\Omega$   
silver plated

gold plated



| Male      | Order No.        | Female    | Order No.        |
|-----------|------------------|-----------|------------------|
| CSSM-0.25 | 101 014 110 0101 | CSSF-0.25 | 101 014 120 0101 |
| CSSM-0.33 | 101 014 110 0201 | CSSF-0.33 | 101 014 120 0201 |
| CSSM-0.52 | 101 014 110 0501 | CSSF-0.52 | 101 014 120 0501 |
| CSGM-0.25 | 101 014 210 0101 | CSGF-0.25 | 101 014 220 0101 |
| CSGM-0.33 | 101 014 210 0201 | CSGF-0.33 | 101 014 220 0201 |
| CSGM-0.52 | 101 014 210 0501 | CSGF-0.52 | 101 014 220 0501 |

| M                         |     |      |      |      |      | F                |     |      |      |      |      |
|---------------------------|-----|------|------|------|------|------------------|-----|------|------|------|------|
| a                         | b   | c    | d    | e    | f    | a                | b   | c    | d    | e    | f    |
| 8.10                      | 4.0 | 14.8 | 0.64 | 1.66 | 14.4 | 8.10             | 4.0 | 14.8 | 0.90 | 1.66 | 14.4 |
| 8.10                      | 4.0 | 14.8 | 0.90 | 1.66 | 14.4 | 8.10             | 4.0 | 14.8 | 1.12 | 1.66 | 14.4 |
| 8.10                      | 4.0 | 14.8 | 1.12 | 1.66 | 14.4 | 8.10             | 4.0 | 14.8 | 1.12 | 1.66 | 14.4 |
| Wire gauge                |     |      |      |      |      | Stripping length |     |      |      |      |      |
| 0.09-0.25 mm <sup>2</sup> |     |      |      |      |      | AWG 28-24        |     |      |      |      |      |
| 0.13-0.33 mm <sup>2</sup> |     |      |      |      |      | AWG 26-22        |     |      |      |      |      |
| 0.33-0.52 mm <sup>2</sup> |     |      |      |      |      | AWG 22-20        |     |      |      |      |      |
|                           |     |      |      |      |      | 5 mm             |     |      |      |      |      |

## Stamped contacts 5A

Contact resistance  $\leq 10\text{m}\Omega$ 

silver plated




gold plated



coil stock



| Male       | Order No.        | Female     | Order No.        |
|------------|------------------|------------|------------------|
| CSSM-0.82P | 101 014 110 0750 | CSSF-0.82P | 101 014 120 0750 |
| CSGM-0.82P | 101 014 210 0750 | CSGF-0.82P | 101 014 220 0750 |

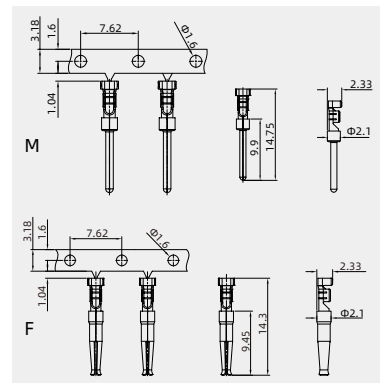

Note: 10kpcs/volume

Notes: The tools for crimp terminal may influence the product quality and stability. Please select the tools recognized by our company.