

Crimp contacts

Crimp contacts 250A (with crown spring), for HC250 inserts.

Contact resistance $\leq 0.3\text{m}\Omega$


silver plated



No.	Male	Order No.	Female	Order No.
①	CHSM250-35	101 028 110 1701	CHSF250-35G	101 028 120 1703
②	CHSM250-50	101 028 110 1801	CHSF250-50G	101 028 120 1803
③	CHSM250-70	101 028 110 1901	CHSF250-70G	101 028 120 1903

For stranded wire acc. to IEC 60 228-5

Crimp zone acc. to DIN 46 235



NO.	Wire gauge	Φ	Stripping length
①	35 mm²	8.45 mm	22 mm
②	50 mm²	10.25mm	22 mm
③	70 mm²	11.75 mm	22 mm


Crimp contacts 300A , for H2MK 300 inserts.

Contact resistance $\leq 0.3\text{m}\Omega$

silver plated



Male	Order No.	Order No.	订货号
CHSM300-70	101 041 110 1950	CHSF300-70	101 041 120 1950
CHSM300-95	101 041 110 2050	CHSF300-95	101 041 120 2050
CHSM300-120	101 041 110 2150	CHSF300-120	101 041 120 2150

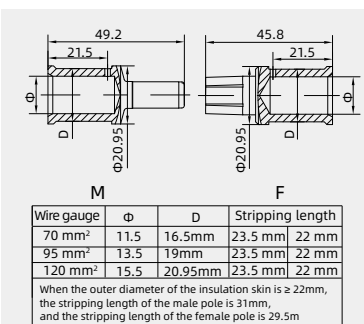

Wire gauge	Φ	D	Stripping length
70 mm²	11.5	16.5mm	23.5 mm 22 mm
95 mm²	13.5	19mm	23.5 mm 22 mm
120 mm²	15.5	20.95mm	23.5 mm 22 mm

When the outer diameter of the insulation skin is $\geq 22\text{mm}$, the stripping length of the male pole is 31mm, and the stripping length of the female pole is 29.5mm

Crimp contacts 350A (with crown spring), for HC350 inserts.

Contact resistance $\leq 0.3\text{m}\Omega$


silver plated



No.	Male	Order No.	Female	Order No.
①	CHSM350-16	101 029 110 1501	CHSF350-16G	101 029 120 1501
②	CHSM350-25	101 029 110 1600	CHSF350-25G	101 029 120 1601
③	CHSM350-35	101 029 110 1701	CHSF350-35G	101 029 120 1703
④	CHSM350-50	101 029 110 1801	CHSF350-50G	101 029 120 1803
⑤	CHSM350-70	101 029 110 1901	CHSF350-70G	101 029 120 1903
⑥	CHSM350-95	101 029 110 2001	CHSF350-95G	101 029 120 2003
⑦	CHSM350-120	101 029 110 2101	CHSF350-120G	101 029 120 2103

For stranded wire acc. to IEC 60 228-5

Crimp zone acc. to DIN 46 235

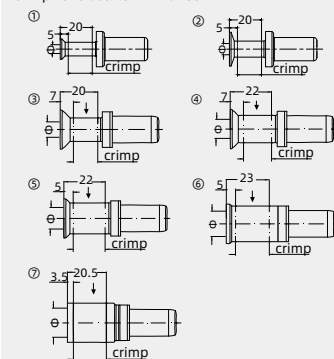

NO.	Wire gauge	Φ	Stripping length
①	16 mm²	5.5 mm	26 mm
②	25 mm²	7 mm	26 mm
③	35 mm²	8.2 mm	26 mm
④	50 mm²	10.0mm	28 mm
⑤	70 mm²	11.5 mm	28 mm
⑥	95 mm²	13.5 mm	30 mm
⑦	120 mm²	15.5 mm	24 mm

Notes: The tools for crimp terminal may influence the product quality and stability. Please select the tools recognized by our company.