

HMP-002 Pneumatic module



Inserts

Combination with hinged frame and other modules possible.


Technical characteristics

Specifications	DIN EN 60 664		
	DIN EN 61 984		
Approvals			
Inserts			
Number of contacts	2	Contacts	
Colour	blue	Material	delrin acetal
Material	polycarbonate	Colour	black
Limiting temperatures	-40°C ...+80°C	Tube termination	
Flammability acc. to UL 94	V0	- Internal diameter (ID)	6.0mm / 1/4 "
Mechanical working life		Working pressure	up to 8 bar / 116 psi
- mating cycles	≥ 500	Sealing	
		-Material	FPM
		Shut off valve	
		-Material	polyformaldehyde

Pneumatic module
Order contacts separately



Description	Designation	Order No.
for 6 mm	HMP-002	129 002 000 0001




Contacts

Pneumatic contacts
for tubeinternal diameter(ID)



Description	Category	ID	Designation	Order No.
without shut off Male		6.0mm	PCM-6.0	101 100 001 0004
without shut off Female		6.0mm	PCF-6.0	101 100 002 0004

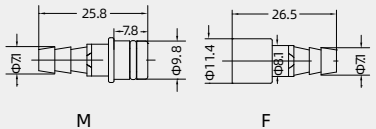

Pneumatic contacts
for tubeinternal diameter(ID)



Description	Category	ID	Designation	Order No.
with shut off Female		6.0mm	PCFS-6.0	101 100 002 0014

