

HR23 Housing material

Housing material

Material	Copper zinc alloy
Surface	Nickel-plated
Sealing	FPM
Temperature range	-40°C ...+130°C
Degree of protection	IP 67


Hoods, top-entry

Install or remove this kind of product need to use the HR23-TL02/N tools.



screw	Designation	Order No.
PG11	HR23-TE-PG11	181 000 410 1002
M20	HR23-TE-M20	181 000 410 1001


Mounted with cable gland to achieve EMC function.

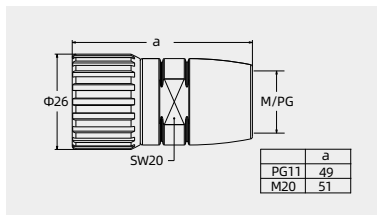

Hoods, top-entry, EMC version



screw	Designation	Order No.
	HR23-TE-EMC	181 000 410 2003

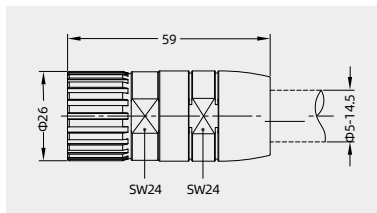


Hood, entry 90°



screw	Designation	Order No.
PG11	HR23-SE-PG11	181 000 510 1002
M20	HR23-SE-M20	181 000 510 1001


Mounted with cable gland to achieve EMC function.

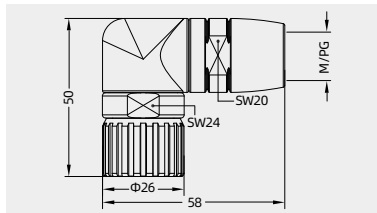

Hood, entry 90°




screw	Designation	Order No.
PG11	HR23-SES-PG11	181 000 510 1102

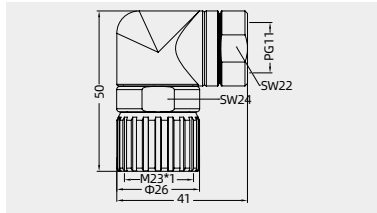

Screw cover , for hoods with rope




screw	Designation	Order No.
	HR23-MCV-M2	181 000 010 9001

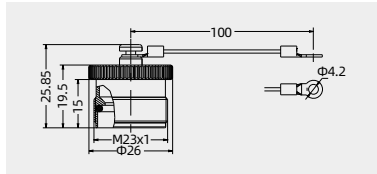

Cable gland



screw	Designation	Order No.
PG11	WNAC-PG11(D5-10)	102 117 003 1001
M20	WNAC-M20(D6-12)	102 117 015 1001

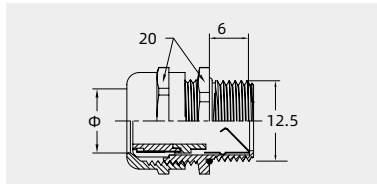

Cable gland

Recommended use



screw	Designation	Order No.
PG11	WNACP-PG11(D5.5-8.5)	102 117 018 1503
M20	WNACP-M20(D5.5-8.5)	102 117 018 1505

