

Pressure tight hoods/housings

Degree of protection: IP68/IP69K

The following hoods/housings comply with the standards for rail transport industry in China.


Only suitable for cable with 18mm diameter

H version

Hoods, top entry, high construction




Thread	Designation	Order No.
	Screw locking	
4M25	HP16B/HE-TEHH-4S-4M25	113 016 430 5003

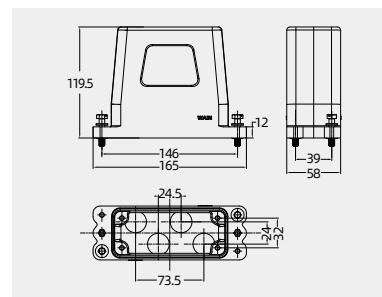

Bulkhead mounted housings




Thread	Designation	Order No.
	Screw locking	
---	HP16B/HE-BK-4H	113 016 330 1002

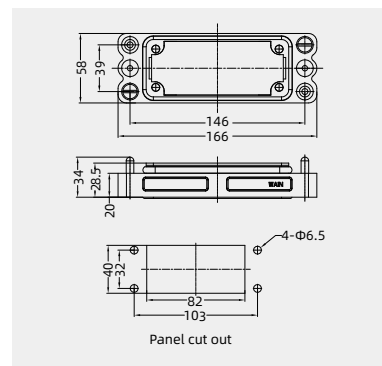

Frame

for 4 pins



Describe	Designation	Order No.
---	HF16B-004A/E-M	131 016 000 1006
---	HF16B-004A/E-F	131 016 000 1007

