

Pressure tight hoods/housings

Degree of protection: IP68/IP69K


The following hoods/housings comply with the standards for rail transport industry in China.

H version


Hoods, top entry, high construction



Thread	Designation	Order No.
	Screw locking	
4M20	HP24B/H-TEH-4S-4M20	113 624 430 5038
4M25	HP24B/H-TEH-4S-4M25	113 624 430 5039

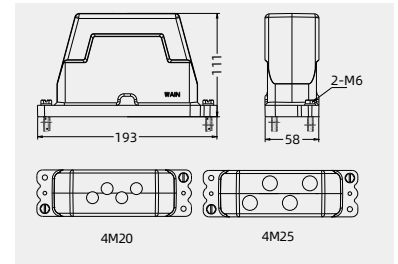Surface mounted housings
high construction


Thread	Designation	Order No.
	Screw locking	
4M20	HP24B/H-SFH-4H-4M20	113 624 230 5038
4M25	HP24B/H-SFH-4H-4M25	113 624 230 5039

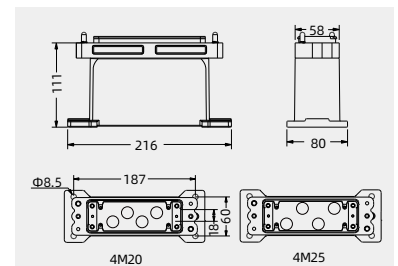

Surface mounted housings




Thread	Designation	Order No.
	Screw locking	
4M20	HP24B/H-BK-SE-4H-4M20	113 624 930 1038
4M25	HP24B/H-BK-SE-4H-4M25	113 624 930 1039

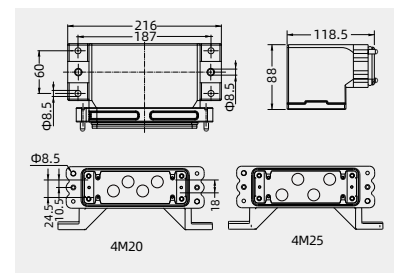

Bulkhead mounted housings



Thread	Designation	Order No.
	Screw locking	
---	HP24B/H-BK-4H	113 624 330 1001

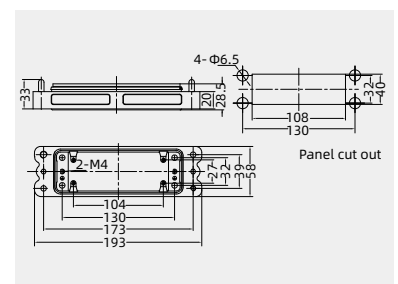

Frame

for 4 pins



Describe	Designation	Order No.
---	HF24B-004A-M	131 024 000 1011
---	HF24B-004A-F	131 024 000 1012

