

Pressure tight hoods/housings


Degree of protection: IP68/IP69K
The following hoods/housings comply with the standards for rail transport industry in China.

H version

Hoods, top entry, high construction



Thread	Designation	Order No.
	Screw locking	
2M25	HP24B/H-TEH-4S-2M25	113 624 430 5023
2M32	HP24B/H-TEH-4S-2M32	113 624 430 5024

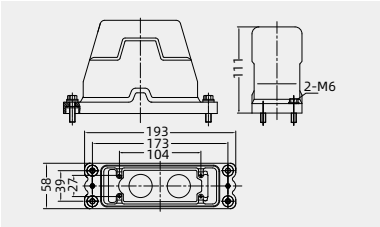


Frame, size 24B hoods/housings

for 2 pins



Describe for 2 pins	Designation	Order No.
	HF24B-002C	131 024 000 1001

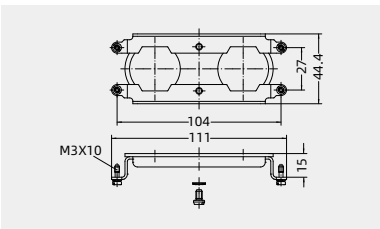

Bulkhead mounted housings



Thread	Designation	Order No.
	Screw locking	
---	HP24B/H-BK-4H	113 624 330 1001

