


24B Pressure tight hoods/housings

Degree of protection: IP68/IP69K


The following hoods/housings comply with the standards for rail transport industry in China.

H version


Hoods, side entry, high construction




Thread	Designation	Order No.
M25	HP24B/H-SEH-4S-M25	113 624 530 5003
M32	HP24B/H-SEH-4S-M32	113 624 530 5004
M40	HP24B/H-SEH-4S-M40	113 624 530 5005
PG21	HP24B/H-SEH-4S-PG21	113 624 530 5011
PG29	HP24B/H-SEH-4S-PG29	113 624 530 5012

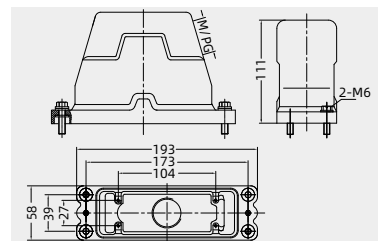

Hoods, top entry, high construction




Thread	Designation	Order No.
M25	HP24B/H-TEH-4S-M25	113 624 430 5003
M32	HP24B/H-TEH-4S-M32	113 624 430 5004
M40	HP24B/H-TEH-4S-M40	113 624 430 5005
M50	HP24B/H-TEH-4S-M50	113 624 430 5006
PG21	HP24B/H-TEH-4S-PG21	113 624 430 5011
PG29	HP24B/H-TEH-4S-PG29	113 624 430 5012
PG36	HP24B/H-TEH-4S-PG36	113 624 430 5013

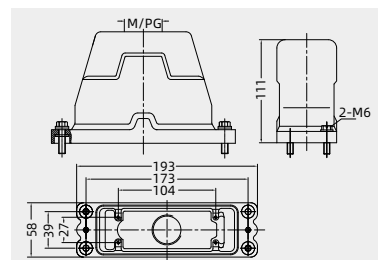

Hoods, top entry, high construction




Thread	Designation	Order No.
3M32	HP24B/H-TEHH-4S-3M32	113 624 430 5037

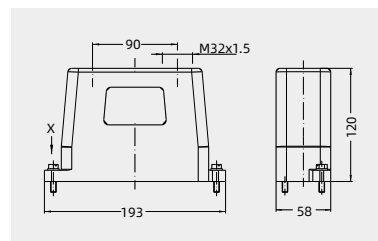

Hoods, top entry, high construction




Thread	Designation	Order No.
M63	HP24B/H-TEH-4S-M63	113 624 430 5007

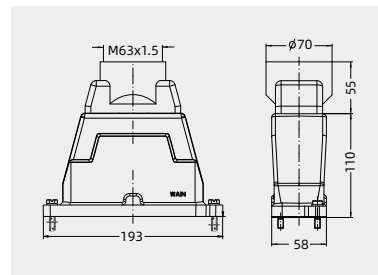

Bulkhead mounted housings



Connect way	Designation	Order No.
---	HP24B/H-BK-4H	113 624 330 1001

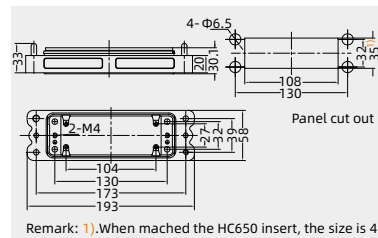

Remark: 1) When mached the HC650 insert, the size is 45