

Pressure tight hoods/housings

Degree of protection: IP68/IP69K

The following hoods/housings comply with the standards for rail transport industry in China.


Only suitable for cable with 18mm diameter

H version

Hoods, top entry, high construction



Thread	Designation	Order No.
	Screw locking	
4M25	HP24B/HE-TEHH-4S-4M25	113 624 430 5139

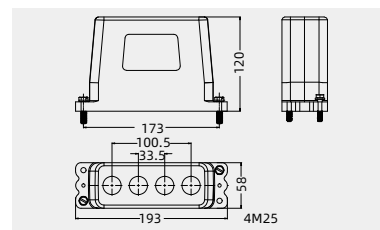


Male,Frame, size 24B hoods/housings

for 4 pins



Describe	Designation	Order No.
for 4 pins	HF24B-004C/E-M	131 024 000 1009

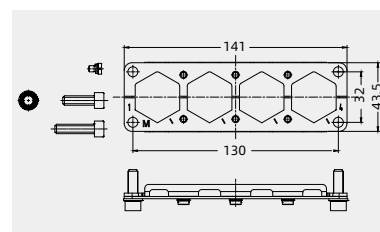


Female,Frame, size 24B hoods/housings

for 4 pins




Describe	Designation	Order No.
for 4 pins	HF24B-004C/E-F	131 024 000 1010

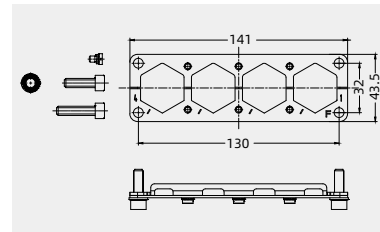


Bulkhead mounted housings



Thread	Designation	Order No.
	Screw locking	
---	HP24B/HE-BK-4H	113 624 330 1101

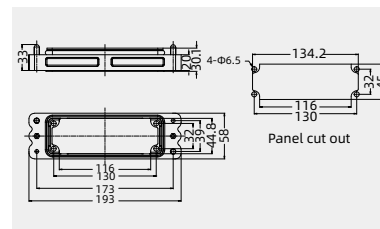

Surface mounted housings



Thread	Designation	Order No.
	Screw locking	
---	HP24B/HE-BK-SE-4M25	113 624 900 1139

