

HE-006 Standard inserts

500V 16A 6+ 

Inserts

Hoods/Housings: size 6B, please find the details on page 15-25~15-38.2.


Screw terminal



Insert	Designation	Order No.
Male	HE-006-M	122 006 011 0001
Female	HE-006-F	122 006 021 0001

Crimp terminal

Order crimp contacts separately



Insert	Designation	Order No.
Male	HE-006-MC ¹⁾	122 006 010 0001
Female	HE-006-FC ¹⁾	122 006 020 0001

1).can match PCB adapter,see page 14-04~14-05.

Male	HE-006-MC/N ²⁾	122 006 010 0101
Female	HE-006-FC/N ²⁾	122 006 020 0101

2).for crimp contacts 16A-Enhanced III ,see page 13-04.

Spring terminal, See P00-14 for the structural characteristics of spring.



Insert	Designation	Order No.
Male	HE-006-MS	122 006 012 0001
Female	HE-006-FS	122 006 022 0001

Male	HE-006-MS B	122 006 012 0101
Female	HE-006-FS B	122 006 022 0101

Double spring connection(Two terminal per contact)
Only suitable for high structure shells

Male	HE-006-MSS	122 006 012 0201
Female	HE-006-FSS	122 006 022 0201

Crimp contacts

Crimp contacts 16A

Contact resistance ≤ 1mΩ
silver plated

gold plated



More crimp contacts 16A see P13-04.

Tools

Crimping tool



Contact removal tool



Male	Order No.	Female	Order No.
CESM-0.37	101 019 110 0301	CESF-0.37	101 019 120 0301
CESM-0.50	101 019 110 0401	CESF-0.50	101 019 120 0401
CESM-0.75	101 019 110 0601	CESF-0.75	101 019 120 0601
CESM-1.0	101 019 110 0801	CESF-1.0	101 019 120 0801
CESM-1.5	101 019 110 0901	CESF-1.5	101 019 120 0901
CESM-2.5	101 019 110 1001	CESF-2.5	101 019 120 1001
CESM-3.0	101 019 110 1101	CESF-3.0	101 019 120 1101
CESM-4.0	101 019 110 1201	CESF-4.0	101 019 120 1201
CEGM-0.37	101 019 210 0301	CEGF-0.37	101 019 220 0301
CEGM-0.50	101 019 210 0401	CEGF-0.50	101 019 220 0401
CEGM-0.75	101 019 210 0601	CEGF-0.75	101 019 220 0601
CEGM-1.0	101 019 210 0801	CEGF-1.0	101 019 220 0801
CEGM-1.5	101 019 210 0901	CEGF-1.5	101 019 220 0901
CEGM-2.5	101 019 210 1001	CEGF-2.5	101 019 220 1001
CEGM-3.0	101 019 210 1101	CEGF-3.0	101 019 220 1101
CEGM-4.0	101 019 210 1201	CEGF-4.0	101 019 220 1201


Wire gauge	Designation	Order No.
0.14-4mm ²	TL02G	198 001 001 0011

Wire gauge: 0.14-0.37mm² please select TL02 Crimping tool.

Application	Designation	Order No.
for crimp contacts 16A	TL01	198 001 000 0002


More tools detail please find the page 32-03~32-06.

1) Distance for contact max. 21 mm


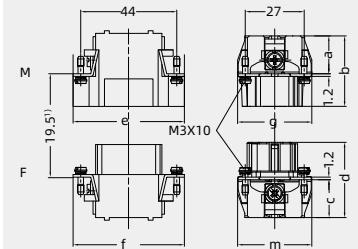


	a	b	e	g	c	d	f	m
M/F	16	32.4	51	34	16.8	34.5	50.5	34
MC/FC	18	33	51	34	18	35	50.5	34
MC/N / FC/N	18.3	34	51	34	19	36	51	34
MS/FS	18	33.3	51	34	18.2	35.4	50.5	34
MSS/FSS	34.5	49.5	50	34	33.4	50	50	34
MS B / FS B	19.5	34.7	51	34	19	36.5	51	34

Contact arrangement view from termination side



Panel cut out for inserts for use without hoods/housings

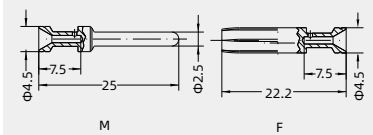

Identification	Wire gauge	Stripping length
no groove	0.14-0.37 mm ² AWG 26-22	7.5mm
no groove	0.5 mm ² AWG 20	7.5mm
1 groove	0.75 mm ² AWG 18	7.5mm
1 groove	1 mm ² AWG 18	7.5mm
2 grooves	1.5 mm ² AWG 16	7.5mm
3 grooves	2.5 mm ² AWG 14	7.5mm
wide groove	3 mm ² AWG 12	7.5mm
no groove	4 mm ² AWG 12	7.5mm

When the wire gauge is less than 0.75mm², it's better to use the auxiliary pin assembly tool TL15.

Notes: The tools for crimp terminal may influence the product quality and stability. Please select the tools recognized by our company.