

HE-032 Standard inserts


500V 16A 32+ 



Inserts

Hoods/Housings: size 32B, please find the details on page 15-151~15-159.


Screw terminal



Insert	Designation	Order No.
Male	HE-016-M	122 016 011 0001
Female	HE-016-M(17-32)	122 016 011 0002
	HE-016-F	122 016 021 0001
	HE-016-F(17-32)	122 016 021 0002

Crimp terminal


Order crimp contacts separately



Insert	Designation	Order No.
Male	HE-016-MC	122 016 010 0001
Female	HE-016-MC(17-32) ¹⁾	122 016 010 0002
	HE-016-FC	122 016 020 0001
	HE-016-FC(17-32) ¹⁾	122 016 020 0002

1).can match PCB adapter,see page 14-04~14-05.

Spring terminal, See P00-14 for the structural characteristics of spring.

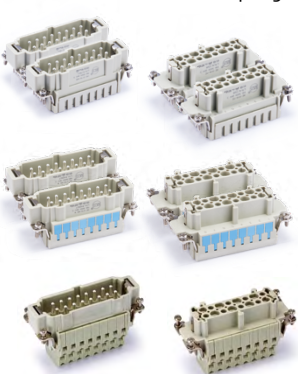

Insert	Designation	Order No.
Male	HE-016-MS	122 016 012 0001
	HE-016-MS(17-32)	122 016 012 0002
Female	HE-016-FS	122 016 022 0001
	HE-016-FS(17-32)	122 016 022 0002
Male	HE-016-MS B	122 016 012 0101
	HE-016-MS B(17-32)	122 016 012 0102
Female	HE-016-FS B	122 016 022 0101
	HE-016-FS B(17-32)	122 016 022 0102
Double spring connection(Two terminal per contact) Only suitable for high structure shells		
Male	HE-016-MSS	122 016 012 0201
	HE-016-MSS(17-32)	122 016 012 0202
Female	HE-016-FSS	122 016 022 0201
	HE-016-FSS(17-32)	122 016 022 0202

Crimp contacts

Crimp contacts 16A

Contact resistance $\leq 1\text{ m}\Omega$
silver plated



gold plated



More crimp contacts16A see P13-04.

Tools

Crimping tool




Contact removal tool



Male	Order No.	Female	Order No.
CESM-0.37	101 019 110 0301	CESF-0.37	101 019 120 0301
CESM-0.50	101 019 110 0401	CESF-0.50	101 019 120 0401
CESM-0.75	101 019 110 0601	CESF-0.75	101 019 120 0601
CESM-1.0	101 019 110 0801	CESF-1.0	101 019 120 0801
CESM-1.5	101 019 110 0901	CESF-1.5	101 019 120 0901
CESM-2.5	101 019 110 1001	CESF-2.5	101 019 120 1001
CESM-3.0	101 019 110 1101	CESF-3.0	101 019 120 1101
CESM-4.0	101 019 110 1201	CESF-4.0	101 019 120 1201
CEGM-0.37	101 019 210 0301	CEGF-0.37	101 019 220 0301
CEGM-0.50	101 019 210 0401	CEGF-0.50	101 019 220 0401
CEGM-0.75	101 019 210 0601	CEGF-0.75	101 019 220 0601
CEGM-1.0	101 019 210 0801	CEGF-1.0	101 019 220 0801
CEGM-1.5	101 019 210 0901	CEGF-1.5	101 019 220 0901
CEGM-2.5	101 019 210 1001	CEGF-2.5	101 019 220 1001
CEGM-3.0	101 019 210 1101	CEGF-3.0	101 019 220 1101
CEGM-4.0	101 019 210 1201	CEGF-4.0	101 019 220 1201


Wire gauge	Designation	Order No.
0.14-4mm ²	TL02G	198 001 001 0011
Wire gauge: 0.14-0.37mm ² please select TL02 Crimping tool.		
Application	Designation	Order No.
for crimp contacts 16A	TL01	198 001 000 0002
More tools detail please find the page 32-03~32-06.		

1) Distance for contact max. 21 mm





	a	b	e	g	c	d	f	m
M/F	17	32.5	84.2	34	17	34.5	84.2	33.5
MC/FC	18	33.5	84.5	34	18	35	84.5	34
MS/FS	18	33.7	84.5	34	18.2	35.5	84.5	34
MSS/FSS	34.3	49	84.5	34	32.2	49	84.5	34
MSB/FSB	19.6	34.7	84.3	34	18.6	36	84.5	34

Contact arrangement view from termination side



Panel cut out for inserts for use without hoods/housings

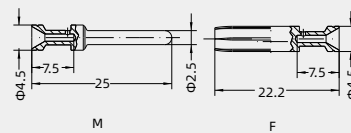

Identification	Wire gauge	Stripping length
no groove	0.14-0.37 mm ² AWG 26-22	7.5mm
no groove	0.5 mm ² AWG 20	7.5mm
1 groove	0.75 mm ² AWG 18	7.5mm
1 groove	1 mm ² AWG 18	7.5mm
2 grooves	1.5 mm ² AWG 16	7.5mm
3 grooves	2.5 mm ² AWG 14	7.5mm
wide groove	3 mm ² AWG 12	7.5mm
no groove	4 mm ² AWG 12	7.5mm

When the wire gauge is less than 0.75mm², it's better to use the auxiliary pin assembly tool TL15.

Notes: The tools for crimp terminal may influence the product quality and stability. Please select the tools recognized by our company.