

HQ-002 Compact inserts-high voltage

830V 40A 2+ 




Inserts

Hoods/Housings: size 3A, please find the details on page 15-06~15-16.1.

Axial screw termination¹⁾
with heat shrink tube²⁾



Insert	Wire gauge	Designation	Order No.
Male	2.5-6.0mm ²	HQ-002.1-M (2.5-6.0mm ²)	130 002 011 0001
	4-10mm ²	HQ-002.2-M (4-10mm ²)	130 002 011 0002
Female	2.5-6.0mm ²	HQ-002.1-F (2.5-6.0mm ²)	130 002 021 0001
	4-10mm ²	HQ-002.2-F (4-10mm ²)	130 002 021 0002

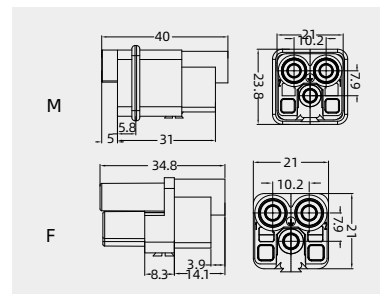

Accessories

Tool

Hex key SW 2




Description	Designation	Order No.
for axial setscrew with grip	SW-2*100	198 001 003 0002

Coding element



Description	Designation	Order No.
coding, pokayoke	CODE-Q2	198 002 005 0011



1) See P00-12~00-13 for the structural characteristics and description of Axial screw terminal.

2) Compared with HQV-002, HQ-002 has pressure-tight heat shrink tubing so that insulation performance has been increased and rated voltage has been enhanced.