

HQ-008/0 Compact inserts

500V 16A 8+ 

Inserts


Hoods/Housings: size **HC**, please find the details on page 15-163~15-168.

Crimp terminal
order crimp contacts separately



Insert	Designation	Order No.
Male	HQ-008/0-MC ¹⁾	130 008 010 0001
Female	HQ-008/0-FC ¹⁾	130 008 020 0001

1).can match PCB adapter,see page 14-10~14-11.

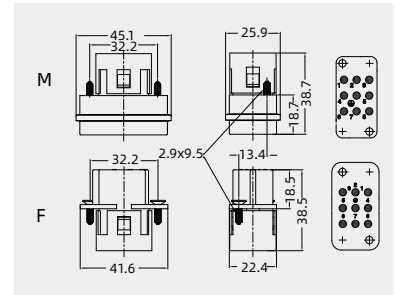

Crimp contacts

Crimp contacts 16A Contact
resistance $\leq 1\text{m}\Omega$


silver plated



gold plated



Male	Order No.	Female	Order No.
CESM-0.37	101 019 110 0301	CESF-0.37	101 019 120 0301
CESM-0.50	101 019 110 0401	CESF-0.50	101 019 120 0401
CESM-0.75	101 019 110 0601	CESF-0.75	101 019 120 0601
CESM-1.0	101 019 110 0801	CESF-1.0	101 019 120 0801
CESM-1.5	101 019 110 0901	CESF-1.5	101 019 120 0901
CESM-2.5	101 019 110 1001	CESF-2.5	101 019 120 1001
CESM-3.0	101 019 110 1101	CESF-3.0	101 019 120 1101
CESM-4.0	101 019 110 1201	CESF-4.0	101 019 120 1201
CEGM-0.37	101 019 210 0301	CEGF-0.37	101 019 220 0301
CEGM-0.50	101 019 210 0401	CEGF-0.50	101 019 220 0401
CEGM-0.75	101 019 210 0601	CEGF-0.75	101 019 220 0601
CEGM-1.0	101 019 210 0801	CEGF-1.0	101 019 220 0801
CEGM-1.5	101 019 210 0901	CEGF-1.5	101 019 220 0901
CEGM-2.5	101 019 210 1001	CEGF-2.5	101 019 220 1001
CEGM-3.0	101 019 210 1101	CEGF-3.0	101 019 220 1101
CEGM-4.0	101 019 210 1201	CEGF-4.0	101 019 220 1201

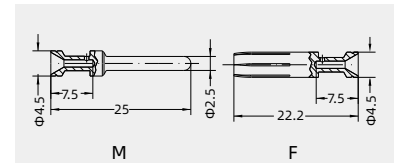

Identification	Wire gauge	Stripping length
no groove	0.14-0.37 mm ² AWG 26-22	7.5mm
no groove	0.5 mm ² AWG 20	7.5mm
1 groove	0.75 mm ² AWG 18	7.5mm
1 groove	1 mm ² AWG 18	7.5mm
2 groove	1.5 mm ² AWG 16	7.5mm
3 groove	2.5 mm ² AWG 14	7.5mm
wide groove	3 mm ² AWG 12	7.5mm
no groove	4 mm ² AWG 12	7.5mm


When the wire gauge is less than 0.75mm²,it's better to use the auxiliary pin assembly tool TL15.

Relay contacts

silver plated



Wire gauge (mm ²)	Designation	Order No.
1	CESM-1.0R	101 019 110 0808
1.5	CESM-1.5R	101 019 110 0908
2.5	CESM-2.5R	101 019 110 1008



Tools

Crimping tool



Contact removal tool



Wire gauge	Designation	Order No.
0.14-4mm ²	TL02G	198 001 001 0011

Wire gauge: 0.14-0.37mm²please select TL02 Crimping tool.


Application	Designation	Order No.
for crimp contacts16A	TL01	198 001 000 0002

More tools detail please find the page32-02~32-05.

Coding element



Description	Designation	Order No.
coding、pokayoke	CODE-E	198 002 005 0002



Notes: The tools for crimp terminal may influence the product quality and stability. Please select the tools recognized by our company.