

HQ-012/0 Compact inserts

400V 10A 12+ 

  ENEC


Inserts

Hoods/Housings: size 3A, please find the details on page 15-06~15-16.1.

Crimp terminal
order crimp contacts separately



Insert	Designation	Order No.
Male	HQ-012/0-MC	130 012 010 0001
Female	HQ-012/0-FC	130 012 020 0001

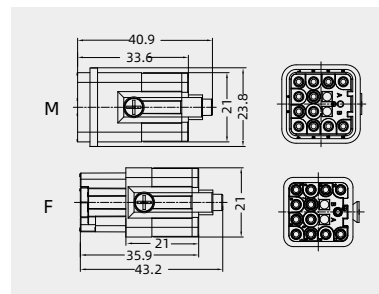

Accessories

Crimp contacts 10A

Contact resistance $\leq 3m\Omega$

silver plated



gold plated




More crimp contacts 10A
see P13-02,P13-03.

Tools



Male	Order No.	Female	Order No.
CDSM-0.25	101 017 110 0101	CDSF-0.25	101 017 120 0101
CDSM-0.37	101 017 110 0301	CDSF-0.37	101 017 120 0301
CDSM-0.50	101 017 110 0401	CDSF-0.50	101 017 120 0401
CDSM-0.75	101 017 110 0601	CDSF-0.75	101 017 120 0601
CDSM-1.0	101 017 110 0801	CDSF-1.0	101 017 120 0801
CDSM-1.5	101 017 110 0901	CDSF-1.5	101 017 120 0901
CDSM-2.5	101 017 110 1001	CDSF-2.5	101 017 120 1001
CDGM-0.25	101 017 210 0101	CDGF-0.25	101 017 220 0101
CDGM-0.37	101 017 210 0301	CDGF-0.37	101 017 220 0301
CDGM-0.50	101 017 210 0401	CDGF-0.50	101 017 220 0401
CDGM-0.75	101 017 210 0601	CDGF-0.75	101 017 220 0601
CDGM-1.0	101 017 210 0801	CDGF-1.0	101 017 220 0801
CDGM-1.5	101 017 210 0901	CDGF-1.5	101 017 220 0901
CDGM-2.5	101 017 210 1001	CDGF-2.5	101 017 220 1001



Wire gauge	Φ	Stripping length
0.09-0.25 mm ² AWG 28-24	0.65	5 mm
0.14-0.37 mm ² AWG 26-22	0.9	8 mm
0.5 mm ² AWG 20	1.1	8 mm
0.75 mm ² AWG 18	1.3	8 mm
1 mm ² AWG 18	1.45	8 mm
1.5 mm ² AWG 16	1.75	8 mm
2.5 mm ² AWG 14	2.25	6 mm

When the wire gauge is less than 0.75mm², it's better to use the auxiliary pin assembly tool TL15.

Wire gauge	Designation	Order No.
0.14-4mm ²	TL02G	198 001 001 0011


Application	Designation	Order No.
for crimp contacts 10A	TL00	198 001 000 0001

More tools detail please find the page 32-02~32-05.

Coding element



Description	Designation	Order No.
coding, pokayoke	CODE-Q12	198 002 005 0010



Notes: The tools for crimp terminal may influence the product quality and stability. Please select the tools recognized by our company.