

HQ-021 High Density inserts

50V 6.5A 21


Inserts

Hoods/Housings: size3A, please find the details on page 15-06~15-16.1.

Crimp terminal
order crimp contacts separately



Insert	Designation	Order No.
Male	HQ-021-MC	130 021 010 0001
Female	HQ-021-FC	130 021 020 0001

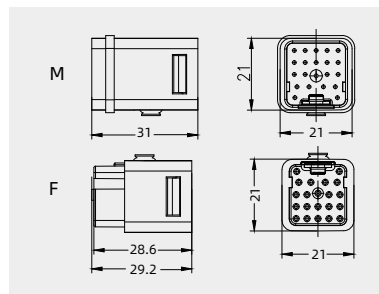

Crimp contacts

Crimp contacts 5A


Contact resistance $\leq 3\text{m}\Omega$
silver plated



gold plated



Male	Order No.	Female	Order No.
CSSM-0.25	101 014 110 0101	CSSF-0.25	101 014 120 0101
CSSM-0.33	101 014 110 0201	CSSF-0.33	101 014 120 0201
CSSM-0.52	101 014 110 0501	CSSF-0.52	101 014 120 0501
CSGM-0.25	101 014 210 0101	CSGF-0.25	101 014 220 0101
CSGM-0.33	101 014 210 0201	CSGF-0.33	101 014 220 0201
CSGM-0.52	101 014 210 0501	CSGF-0.52	101 014 220 0501

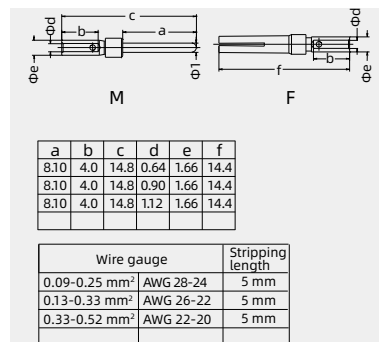

Stamped contacts 5A

Contact resistance $\leq 10\text{m}\Omega$
silver plated



gold plated



coil stock



Note: 10kpcs/volume

Male	Order No.	Female	Order No.
CSSM-0.82P	101 014 110 0750	CSSF-0.82P	101 014 120 0750
CSGM-0.82P	101 014 210 0750	CSGF-0.82P	101 014 220 0750

Tools

Crimping tool



Contact removal tool



Wire gauge	Designation	Order No.
0.09-0.82mm ²	TL03	198 001 001 0002
Application	Designation	Order No.
for crimp contacts 5A	TL08	198 001 000 0006

Notes: The tools for crimp terminal may influence the product quality and stability. Please select the tools recognized by our company.