

Pressure tight hoods/housings - enlarged

Degree of protection: IP68/IP69K

The following hoods/housings comply with the standards for rail transport industry in China.


Only suitable for cable with 25mm diameter

H version

Hoods, top entry, high construction



Thread	Designation	Order No.
	Screw locking	
3M32	HP24B/HE-TEHH-4S-3M32	113 624 430 5137

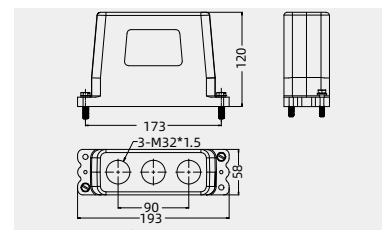


Male, Frame, size 24B hoods/housings

for 3 pins



Describe for 3 pins	Designation	Order No.
	HF24B-003R/E-M	131 024 000 1007

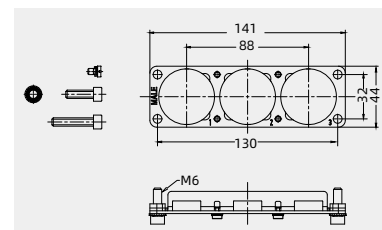


Female, Frame, size 24B hoods/housings

for 3 pins




Describe for 3 pins	Designation	Order No.
	HF24B-003R/E-F	131 024 000 1008

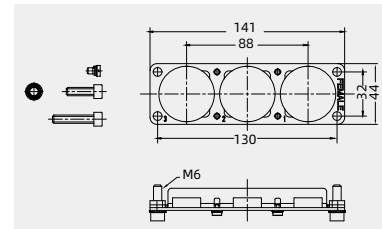


Bulkhead mounted housings




Thread	Designation	Order No.
	Screw locking	
---	HP24B/HE-BK-4H	113 624 330 1101

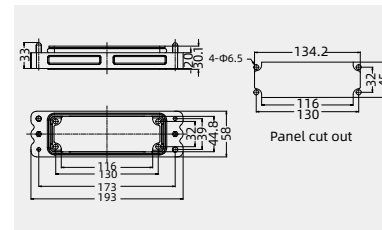

Surface mounted housings



Thread	Designation	Order No.
	Screw locking	
3M32	HP24B/HE-BK-SE-3M32	113 624 900 1137

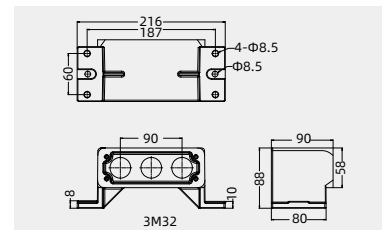

Hexagonal adapter[optional]

metal version
with O-Ring



Describe for 650 Hoods/Housings:	Designation	Order No.
HP24B/HE-TEHH-4S-3M32, HP24B/HE-BK-SE-3M32	WNSC-M32M32/APT	102 103 019 1001

