

M12-A Circular Connector

30/60/125/250V 1.5/2/4A

Technical characteristics

	3-pole	4-pole	5-pole	8-pole	12-pole
Rated current (40°C)	4A	4A	4A	2A	1.5A
Rated voltage	250V	250V	125V	60V	30V
Rated impulse voltage	2500V	2500V	1500V	800V	800V
Pollution degree	3	3	3	3	3
Overvoltage categorie	II	II	II	II	II
Contact resistance	≤ 10 mΩ	≤ 10 mΩ	≤ 10 mΩ	≤ 10 mΩ	≤ 10 mΩ
Connector locking system	screw M12x1	screw M12x1	screw M12x1	screw M12x1	screw M12x1
Termination	screw/solder	screw/solder	screw/solder	screw/solder	solder
Wire gauge	max.0.75mm ² (max.AWG18)	max.0.75mm ² (max.AWG18)	max.0.75mm ² (max.AWG18)	max.0.5mm ² (max.AWG20)	max.0.25mm ² (max.AWG24)
Cable outlet	4-6,6-8mm	4-6,6-8mm	4-6,6-8mm	6-8,8-10mm	6-8,8-10mm
Degree of protection	IP67	IP67	IP67	IP67	IP67
Mechanical operation	> 100	> 100	> 100	> 100	> 100
Limiting temperature	-40°C ...+85°C	-40°C ...+85°C	-40°C ...+85°C	-40°C ...+85°C	-40°C ...+85°C
Material group	II	II	II	II	II
Material of contact	copper alloy	copper alloy	copper alloy	copper alloy	copper alloy
Contact plating	Au	Au	Au	Au	Au
Insulating material	PA	PA	PA	PA	PA
Material of housing	zinc diecasting nickel plated, brass nickel plated	zinc diecasting nickel plated, brass nickel plated	zinc diecasting nickel plated, brass nickel plated	zinc diecasting nickel plated, brass nickel plated	zinc diecasting nickel plated, brass nickel plated

Straight cable connectors, shielded

Female cable connector, shielded,

screw clamp connection,
version with shielding ring

Recommended use




A-Code



12pin

Contacts	Cable outlet	Designation	Order No.
3	4-6 mm	M12-F03A-T-D6-SH	163 003 421 2001
	6-8 mm	M12-F03A-T-D8-SH	163 003 421 2002
	8-10 mm	M12-F03A-T-D10-SH	163 003 421 2500
4	4-6 mm	M12-F04A-T-D6-SH	163 004 421 2001
	6-8 mm	M12-F04A-T-D8-SH	163 004 421 2002
	8-10 mm	M12-F04A-T-D10-SH	163 004 421 2502
5	4-6 mm	M12-F05A-T-D6-SH	163 005 421 2001
	6-8 mm	M12-F05A-T-D8-SH	163 005 421 2002
	8-10 mm	M12-F05A-T-D10-SH	163 005 421 2502
8	6-8 mm	M12-F08A-T-D8-SH	163 008 421 2002
	8-10 mm	M12-F08A-T-D10-SH	163 008 421 2500

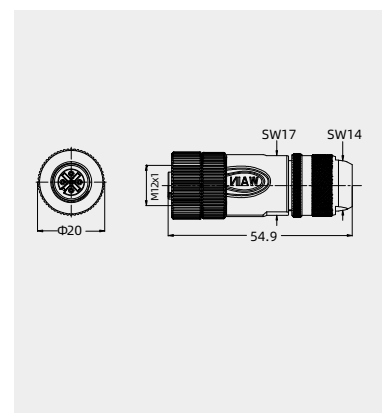

M12-A

Female cable connector, shielded,

solder, version with shielding ring

Recommended use




A-Code



12pin

Contacts	Cable outlet	Designation	Order No.
3	4-6 mm	M12-FST03A-T-D6-SH	163 003 423 2500
	6-8 mm	M12-FST03A-T-D8-SH	163 003 423 2501
4	4-6 mm	M12-FST04A-T-D6-SH	163 004 423 2500
	6-8 mm	M12-FST04A-T-D8-SH	163 004 423 2002
5	4-6 mm	M12-FST05A-T-D6-SH	163 005 423 2001
	6-8 mm	M12-FST05A-T-D8-SH	163 005 423 2002
8	4-6 mm	M12-FST08A-T-D6-SH	163 008 423 2501
	6-8 mm	M12-FST08A-T-D8-SH	163 008 423 2500
12	6-8 mm	M12-FST12A-T-D8-SH	163 012 423 2003
	8-10 mm	M12-FST12A-T-D10-SH	163 012 421 2500

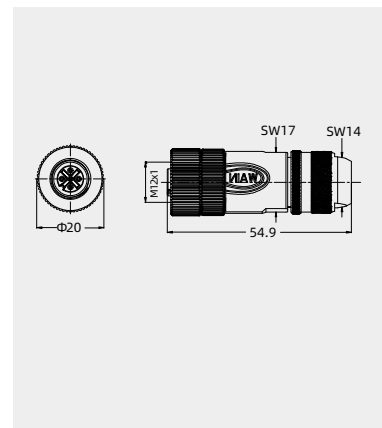

Hexagonal driver



Description	Designation	Order No.
for 8 pin screw clamp connection	SW-1.27*47	198 001 003 0016

