

M12-D Circular Connector

250V 4A

Technical characteristics

Number of contacts	4
Rated current (40°C)	4A
Rated voltage	250V
Rated impulse voltage	2500V
Pollution degree	3
Overvoltage categorie	II
Contact resistance	≤ 10 mΩ
Connector locking system	screw M12x1
Termination	crimp, moulded
Wire gauge	0.34mm ² (AWG22)
Cable outlet	-
Degree of protection	IP67
Mechanical operation	> 500
Limiting temperature	-20°C ...+60°C
Material group	II
Material of contact	copper alloy
Contact plating	Au
Insulating material	PA
Material of housing	TPU

Cable connectors-wire jumper

Male cable connector,Cat.5e

Ethernet




D-Code



4pin

Contacts	Cable length	Designation	Order No.
4	1.5 m	M12-M04D-T/M04D-T-1.5-PUR-Cat.5e	163 004 401 4510
	5.0 m	M12-M04D-T/M04D-T-5.0-PUR-Cat.5e	163 004 401 4509

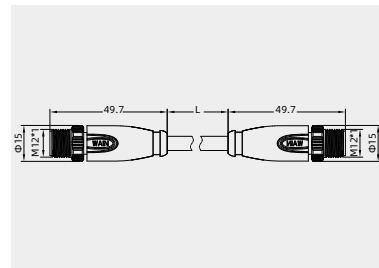

Female cable connector, Cat.5e

Ethernet




D-Code



4pin

Contacts	Cable length	Designation	Order No.
4	1.5 m	M12-F04D-T/F04D-T-1.5-PUR-Cat.5e	163 004 402 4512
	5.0 m	M12-F04D-T/F04D-T-5.0-PUR-Cat.5e	163 004 402 4511

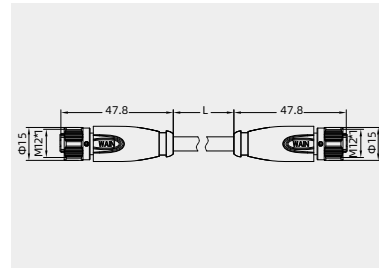

Cat.5e Ethernet



D-Code




4pin



4pin

Contacts	Cable length	Designation	Order No.
4	1.5 m	M12-M04D-T/F04D-T-1.5-PUR-Cat.5e	163 004 400 4017
	5.0 m	M12-M04D-T/F04D-T-5.0-PUR-Cat.5e	163 004 001 4013

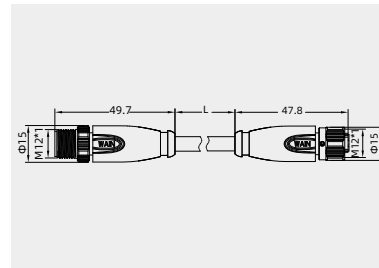

•Further cable length upon request, minimum order quantity is 200 pcs.

M12-D