

M12-D Circular Connector

250V 4A

Technical characteristics

Number of contacts	4
Rated current (40°C)	4A
Rated voltage	250V
Rated impulse voltage	2500V
Pollution degree	3
Overvoltage categorie	II
Contact resistance	≤ 10 mΩ
Connector locking system	screw M12x1
Termination	crimp, moulded
Wire gauge	0.14mm ² (AWG26)
Cable outlet	-
Degree of protection	IP67
Mechanical operation	> 500
Limiting temperature	-20°C ...+60°C
Material group	II
Material of contact	copper alloy
Contact plating	Au
Insulating material	PA
Material of housing	TPU

Straight cable connectors, cable

Male cable connector, Cat.5e

Ethernet




D-Code



4pin

Contacts	Cable length	Designation	Order No.
4	1.5 m	M12-M04D-T/RJ45-T-1.5-PUR-Cat.5e	163 004 001 4021
	5.0 m	M12-M04D-T/RJ45-T-5.0-PUR-Cat.5e	163 004 001 4004

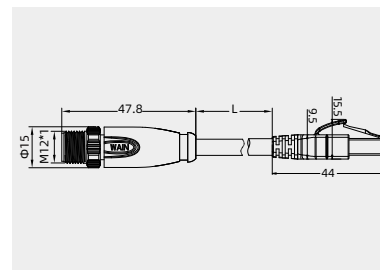

Female cable connector, Cat.5e

Ethernet




D-Code



4pin

Contacts	Cable length	Designation	Order No.
4	1.5 m	M12-F04D-T/RJ45-T-1.5-PUR-Cat.5e	163 004 402 4506
	5.0 m	M12-F04D-T/RJ45-T-5.0-PUR-Cat.5e	163 004 402 4507

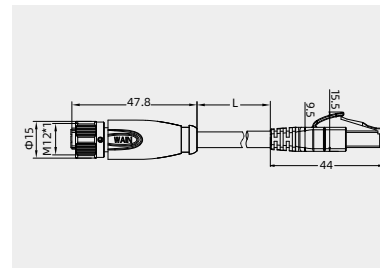

Cat.5e Ethernet

Ethernet, Cat.5e



Contacts	Cable length	Designation	Order No.
4	1.5 m	2RJ45-T-M04-T-1.5-PUR-Cat.5e	172 004 000 4002
	5.0 m	2RJ45-T-M04-T-5.0-PUR-Cat.5e	172 004 000 4001

