

Circular Connector M23

630/250V 30/9A

Technical characteristics


Specifications					
Specifications	DIN EN 60 664				
	DIN EN 61 984				
Approvals					
Electrical data				Mechanical date	
Number of contacts	6(5+PE)		8(4+3+PE)	Housing material	CuZn,Zinc(GD-Zn)
Contacts	5+PE	4	3+PE	Housing surface	Nickel-plated
ContactsΦ(mm)	2	1	2	Insulating bodies	Polyamide
mm²/AWG	0.1...4.0/28-12	0.03...1.0/32-18	0.1...4.0/28-12	Contact material	copper alloy
Rated current(25°C)	30	9	30	Contact surface	gold plated
Rated voltage	630	250	630	Terminal	Crimp version
Test voltage Urms (AC)	6kV	4kV	6kV	Gasket and O ring	Fluorine rubber
Overvoltage categorie	III		III	Ambient temperature	-40°C ...+130°C
Pollution degree	3		3	Connector locking system	M23screw
				Mechanical operation	> 500
				Degree of protection	IP67

Male, Crimp terminal

order crimp contacts separately
Elbow with rotated function



Contacts	Designation	Order No.
6(5+PE)	M23-MC06-BKP26-SE-OD2.7	166 006 610 1003
8(4+3+PE)	M23-MC04/4-BKP26-SE-OD2.7	166 008 610 1011

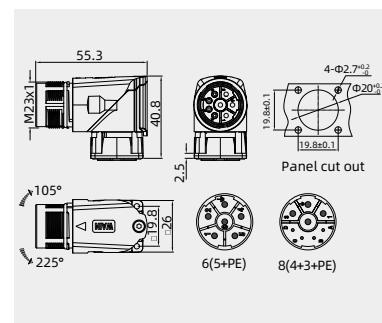


Male, Crimp terminal

order crimp contacts separately
Elbow with rotated function



Contacts	Designation	Order No.
6(5+PE)	M23-MC06-BKP28.8-SE	166 006 310 1003
8(4+3+PE)	M23-MC04/4-BKP28.8-SE	166 008 310 1003

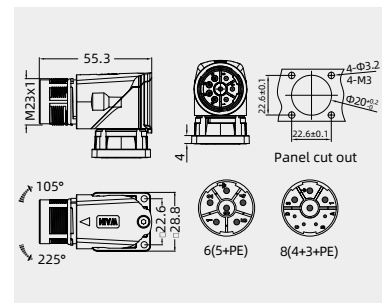

Crimp contacts

Crimp contacts 9A/30A



No.	Wire gauge(mm ²)	Male	Order No.
①	0.03-0.34	M23-MC9G-0.34	101 031 210 2501
②	0.14-1.0	M23-MC9G-1.0	101 031 210 0801
③	0.1-0.5	M23-MC30G-0.5	101 032 210 0401
④	0.35-2.5	M23-MC30G-2.5	101 032 210 1001
⑤	2.5-4.0	M23-MC30G-4.0	101 032 210 1201

M23-MC9G-1.5				M23-MC30G-2.5			
NO.	Φa	Φb	Stripping Length	NO.	Φa	Φb	Stripping Length
①	1.7	0.9	4mm	①	1.7	0.9	14
②	2.1	1.45	4mm	②	2.1	1.45	14
				③	1.75	-	16.7

Tools

Crimping tool



Wire gauge	Designation	Order No.
0.14-4 mm ²	TL28-2	198 001 001 0039

Notes: The tools for crimp terminal may influence the product quality and stability.
Please select the tools recognized by our company.