

7/8 Circular Connector

300V 10/8A

Technical characteristics

Number of contacts	3 (2+PE)	4 (3+PE)	5 (4+PE)
Rated current (40°C)	10A	8A	8A
Rated voltage	300V	300V	300V
Rated impulse voltage	2500V	2500V	2500V
Pollution degree	3	3	3
Overvoltage categorie	III	III	III
Contact resistance	≤ 3 mΩ	≤ 3 mΩ	≤ 3 mΩ
Connector locking system	screw 7/8-16UN	screw 7/8-16UN	screw 7/8-16UN
Termination	single wires	single wires	single wires
Wire gauge	max.1.5mm ² (max.AWG16)	max.1.5mm ² (max.AWG16)	max.1.5mm ² (max.AWG16)
Cable outlet	-	-	-
Degree of protection	IP67	IP67	IP67
Mechanical operation	> 100	> 100	> 100
Limiting temperature	-25°C ...+85°C	-25°C ...+85°C	-25°C ...+85°C
Material group	II	II	II
Material of contact	copper alloy	copper alloy	copper alloy
Contact plating	Au	Au	Au
Insulating material	TPU	TPU	TPU
Material of housing	brass nickel plated	brass nickel plated	brass nickel plated

Socket

Female panel mount connector

with single wires,
0.82mm², MAX.1.5mm²
length 0.2m
font fastened




7/8



Contacts	screw	Designation	Order No.
3 (2+PE)	7/8-16UN	7/8-F03-BK-7/8-W0.82	168 003 302 4004
	PG11	7/8-F03-BK-PG11-W0.82	168 003 302 4001
	PG13.5	7/8-F03-BK-PG13.5-W0.82	168 003 302 4002
	M20×1.5	7/8-F03-BK-M20-W0.82	168 003 302 4003
4 (3+PE)	7/8-16UN	7/8-F04-BK-7/8-W0.82	168 004 302 4005
	PG11	7/8-F04-BK-PG11-W0.82	168 004 302 4001
	PG13.5	7/8-F04-BK-PG13.5-W0.82	168 004 302 4002
	M20×1.5	7/8-F04-BK-M20-W0.82	168 004 302 4003
5 (4+PE)	7/8-16UN	7/8-F05-BK-7/8-W0.82	168 005 302 4005
	PG11	7/8-F05-BK-PG11-W0.82	168 005 302 4001
	PG13.5	7/8-F05-BK-PG13.5-W0.82	168 005 302 4002
	M20×1.5	7/8-F05-BK-M20-W0.82	168 005 302 4003

Customized cable length upon request

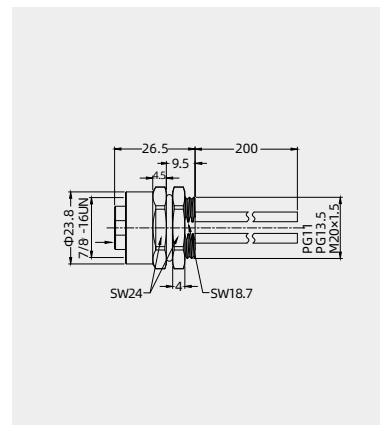

Female panel mount connector , solder



7/8

7/8



Contacts	screw	Designation	Order No.
3 (2+PE)	PG11	7/8-F03-BK-PG11-C	168 003 323 1500
	PG13.5	7/8-F03-BK-PG13.5-C	168 003 323 1501
	M20×1.5	7/8-F03-BK-M20-C	168 003 323 1502
4 (3+PE)	PG11	7/8-F04-BK-PG11-C	168 004 323 1500
	PG13.5	7/8-F04-BK-PG13.5-C	168 004 323 1501
	M20×1.5	7/8-F04-BK-M20-C	168 004 323 1502
5 (4+PE)	PG11	7/8-F05-BK-PG11-C	168 005 323 1500
	PG13.5	7/8-F05-BK-PG13.5-C	168 005 323 1501
	M20×1.5	7/8-F05-BK-M20-C	168 005 323 1502

