


Q-Coax Electromagnetic screening module

Assembly instructions see P10-63.




Combination with hinged frame and other modules possible.

Crimp terminal




Insert	Designation	Order No.
Male	H2M-002-M	129 002 001 0001
Female	H2M-002-F	129 002 002 0001

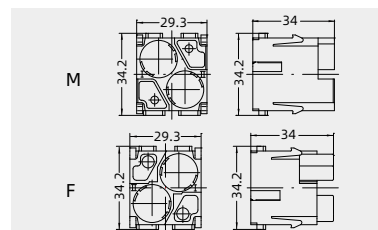

Q-Coax metal adapter




Description	Designation	Order No.
	APT-H2MQ	198 002 007 0006

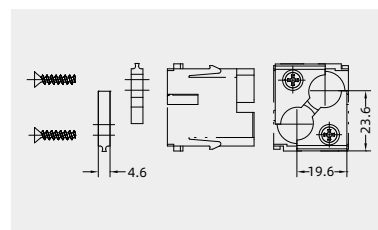

Q-Coax plastic adapter




Description	Designation	Order No.
	APT.P-H2MQ	198 002 007 0032

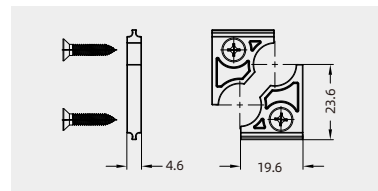

Rubber stopper



Description	Designation	Order No.
	φ16*10	198 002 099 0035

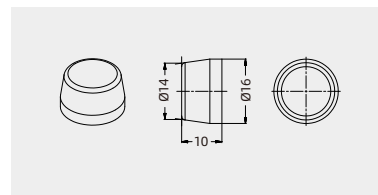


Q-Coax 4 + shielding

Crimp contacts 10A
Order crimp contacts separately
Cable diameter 3mm-9.5mm



Description	Designation	Order No.
Male	EMC-004-MC	129 004 010 0082
Female	EMC-004-FC	129 004 020 0082

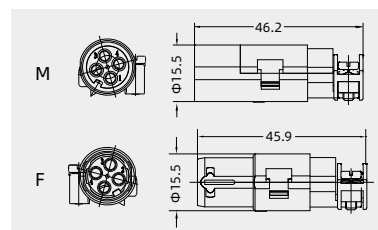

Crimp contacts


Crimp contacts 10A

Contact resistance ≤ 3mΩ
gold plated



More 10A crimp contacts
see P13-02, P13-03.

Wire gauge	Male	Order No.	Female	Order No.
0.09-0.25	CDGM-0.25	101 017 210 0101	CDGF-0.25	101 017 220 0101
0.14-0.37	CDGM-0.37	101 017 210 0301	CDGF-0.37	101 017 220 0301
0.5	CDGM-0.50	101 017 210 0401	CDGF-0.50	101 017 220 0401
0.75	CDGM-0.75	101 017 210 0601	CDGF-0.75	101 017 220 0601
1	CDGM-1.0	101 017 210 0801	CDGF-1.0	101 017 220 0801
1.5	CDGM-1.5	101 017 210 0901	CDGF-1.5	101 017 220 0901
2.5	CDGM-2.5	101 017 210 1001	CDGF-2.5	101 017 220 1001

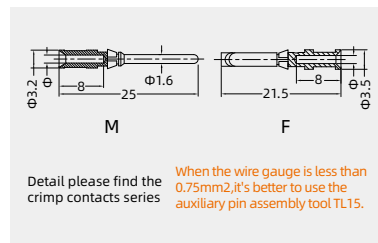

Notes: The tools for crimp terminal may influence the product quality and stability. Please select the tools recognized by our company.

*Please find the details of crimp contact tools on page 32-02~32-05.